

Seat belt Port Pad Sewing Instructions

Cut 3 6.5" x 6.5" squares


6" x 6" batting or polyfil

Use a ¼ " seam allowance

With right sides together, sew 2 squares and polyfil, leaving a 2" opening. Fold the remaining square in half lengthwise, right sides together. Stitch leaving an opening for turning.



Turn both pieces right side out. Be sure to get the corners square. Fold in the seam allowance, press and stitch the opening.

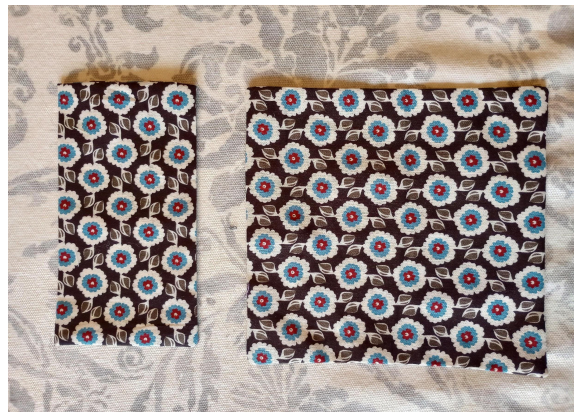

Sew the Velcro onto the ends of the rectangle. One strip on either side.



Lay the rectangle across the middle of the square and pin. Sew two seam two inches from each side of the square.

